


# Cadenas Transportadoras de rodillos "LIGERAS"

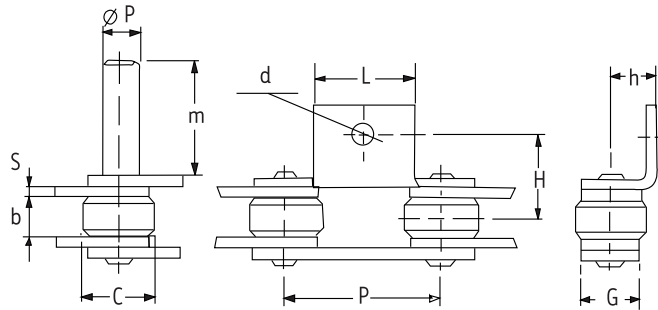

PASO P	ANCHO B	RODILLO C	MALLAS		H	h	L	d	m	PIVOTE øP	GARGA DE ROTURA ΔdaN
			G ANCHO	S GRUESO							
mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
35.0	14.0	14	18	3.0	25.5	14.0	28	7.0	30	10	3500
35.0	16.0	20	18	2.5	25.5	14.0	28	7.0	30	10	2500
41.3	10.0	25	22	3.0	26.0	20.0	28	8.5	40	12	3500
41.3	16.0	16	22	3.0	29.0	20.0	28	8.5	40	12	3500
41.3	16.0	25	22	3.0	29.0	20.0	28	8.5	40	12	3500
50.8	16.0	25	20	3.0	30.0	16.0	35	7.0	30	10	4000
69.0	12.0	25	19	2.5	25.0	25.5	60	7.0	30	10	3000
69.0	12.5	30	25	3.0	29.5	27.5	60	9.0	40	12	4500
75.0	18.0	30	25	3.0	32.0	19.0	60	9.0	40	12	4500

Estas cadenas se fabrican tanto en acero normal como en acero inoxidable.

# Cadenas Transportadoras Ejecución sólo Acero Inoxidable

PASO P	ANCHO B	RODILLO C	MALLAS		H	h	L	d	m	PIVOTE øP	GARGA DE ROTURA ΔdaN
			G ANCHO	S GRUESO							
mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
35	14	14	18	2.5	22.5	14.0	28	7	30	10	2000
*35	14	22	18	2.5	22.5	14.0	28	7	30	10	2000
*41.3	14	30	25	3.0	35.0	18.0	35	7	40	10	3500
41.3	19	30	25	3.0	37.5	18.0	35	7	40	10	3500

\* Variante con rodillo DELRIN